

PRODUCT INFO

CSX SERIES

The all-in-one upgrade for marine refrigeration. The Dometic CSX delivers next-generation cooling performance in a compact, integrated design. With precision temperature control, fan-assisted cooling and ultra-efficient, low-GWP refrigerant, it's built to keep food and drinks fresher for longer - no matter where you sail.

ALL-IN-ONE DESIGN
FULLY INTEGRATED

FAST, EVEN COOLING
FAN-ASSISTED AIRFLOW

PRECISION CONTROL
NTC SENSOR



Mobile living made easy.

 **DOMETIC**

COOL SMARTER EXPLORE MORE

The Dometic CSX is a self-contained cooling system engineered for effortless installation and reliable performance. Ideal for volumes between 50 and 400 L, it combines a high-efficiency compressor, fan-cooled evaporator and digital temperature control in one space-saving unit. Simply drop it in, connect power, and enjoy consistent cooling without the complexity of remote couplings. With low-GWP refrigerant*, reduced power draw and a durable marine-ready build, the CSX is the smarter way to keep provisions fresh - whether you're coastal cruising or voyaging offshore.

Benefits with Dometic CSX Series

- Integrated compressor and evaporator for easy drop-in install
- Fan-assisted airflow reduces cool-down time and maintains even temperature
- Digital temperature control with high-accuracy NTC sensor
- Up to 20% lower power consumption vs. previous models
- Low-GWP refrigerant* (R1234yf) for reduced environmental impact
- Built-in LED compartment lighting for better visibility
- Compact footprint for space-restricted galleys or boxes
- Available in refrigerator or deep-freezer versions
- Electronic control with automatic defrost logic

*GWP = Global Warming Potential refers to the global warming potential should a gas be emitted into the atmosphere. The higher the GWP value, the more harmful the gas's impact on the environment.

Specifications

| | |
|----------------|---|
| VOLUME RANGE | 60–200 L (CSX-200) 60–150 L Freezer (CSX-FZ150) 250–400 L (CSX-400) |
| REFRIGERANT | R1234yf |
| CONTROL SYSTEM | Digital display (internal or external mount) NTC sensor |
| COOLING METHOD | Fan-cooled evaporator with integrated compressor |
| POWER SUPPLY | 12/24 V DC |
| LIGHTING | Built-in LED compartment lighting |
| INSTALLATION | Drop-in, no couplings required |



Mobile living made easy.




COOL SMARTER EXPLORE MORE



DOMETIC CSX SERIES TECHNICAL DATA

| MODEL | CSX200 | CSX400 | CSX150FZ |
|---------------------------------|-----------------|-----------------|---------------------|
| SKU | 9630000213 | 9630000214 | 9630000215 |
| Max. Cooling Capacity (L) | 200 | 400 | 150 (Deep Freezing) |
| Connection Voltage | 12 / 24v DC | | |
| Power Consumption (Rated Max W) | 75 | 77 | 81 |
| Refrigerant Type | r1234yf | | |
| Global Warming Potential (GWP) | 4 | | |
| Refrigerant Quantity (g) | 42 | 45 | 65 |
| CO2 Equivalent (tCO2) | 0.00017 | 0.00018 | 0.00026 |
| Dimensions (W x H x D) (MM) | | | |
| Full Unit | 257 x 350 x 225 | 257 x 350 x 227 | 414 x 415 x 400 |
| Evaporator Side | 257 x 350 x 79 | 257 x 350 x 79 | 414 x 415 x 170 |
| Cutout | 204 x 210 | 204 x 210 | 204 x 210 |
| Weight (kg) | 5.8 | 5.8 | 8.5 |

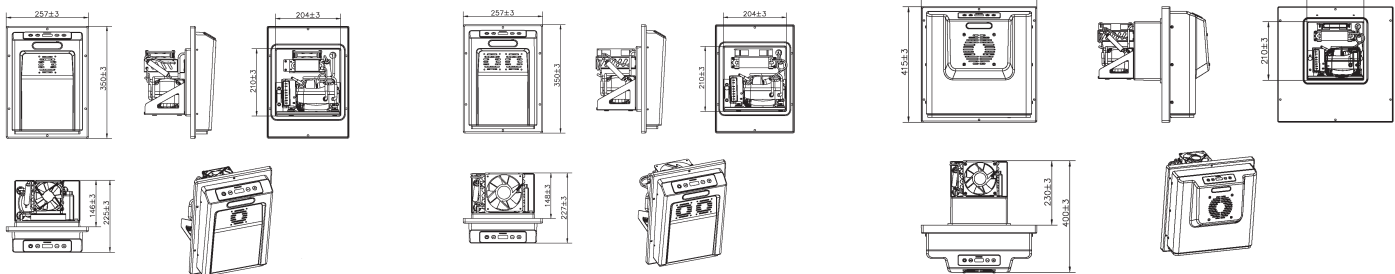

CSX 200

CSX 400

CSX 150FZ